

# 5.8 GHz ISM / UNII Band 27 dBi Reflector Grid Wireless LAN Antenna - Model: HG5827G

#### **Applications and Features**

#### Applications:

- 5.8GHz UNII applications
- 5.8GHz ISM applications
- 5.8GHz Wireless LAN systems
- Long-range Directional Applications
- Point to Point, Point to Multi-point Systems
- Wireless Bridges
- Backhaul Applications
- Wireless Video Systems



- 27 dBi gain
- Superior performance
- Cast aluminum construction
- UV stable light gray powder coat finish
- All weather operation
- Easy to assemble



## **Description**


#### **Superior Performance**

The HyperGain® HG5827G High-Performance Reflector Grid Wi-Fi Antenna is ideal for long-range highly directional 5.8GHz ISM and UNII band applications. These antennas are ideal for point to point systems, point to multi-point and wireless bridges. Its compact design makes it nearly invisible in most installations, and it can be installed for either vertical or horizontal polarization.

## **Rugged and Weatherproof**

The antennas' construction features a rustproof cast aluminum reflector grid for superior strength and lightweight. The 2-piece reflector grid is simple to assemble and significantly reduces shipping costs. The grid surface is UV powder coated for durability and aesthetics. The open-frame grid design minimizes wind loading.

This antenna is supplied with a 60-degree tilt and swivel mast mount kit. This allows installation at various degrees of incline for easy alignment. They can be adjusted up or down from 0° to 60°.





Tilt & Swivel Mast Mount






# **Specifications**

Frequency	5725-5850 MHz
Gain	27 dBi
Polarization	Horizontal or Vertical
Horizontal Beam Width	6°
Vertical Beam Width	9°
Front to Back Ratio	25 dB
Impedance	50 Ohm
Max. Input Power	100 Watts
VSWR	< 1.5:1 avg.
Weight	5.3 lbs. (2.4 kg)
Grid Dimensions	15.7 x 23.6 inches (400 x 600 mm)
Mounting	2 in. (50.8 mm) diameter mast max.
Operating Temperature	-40° C to to 85° C (-40° F to 185° F)
Lighting Protection	DC Ground
Connector	N-Female
RoHS Compliant	Yes

### Wind Loading Data

Wind Speed (MPH)	Loading
100	20.0 lb.
120	31.0 lb.

## **RF Antenna Patterns**

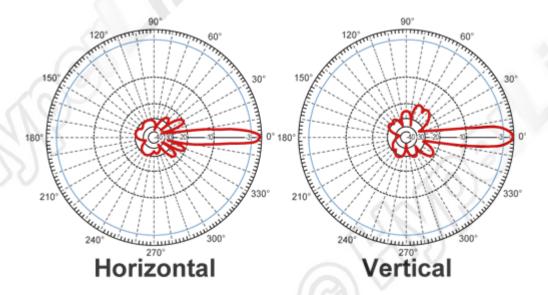

## **Guaranteed Quality**

This product is backed by Hyperlink's Limited Warranty

