


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

| REVISIONS | | | |
|-----------|-----------------|---------|-----------|
| REV | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 7/13/12 | D.GRIFFIN |
| | | | |
| | | | |

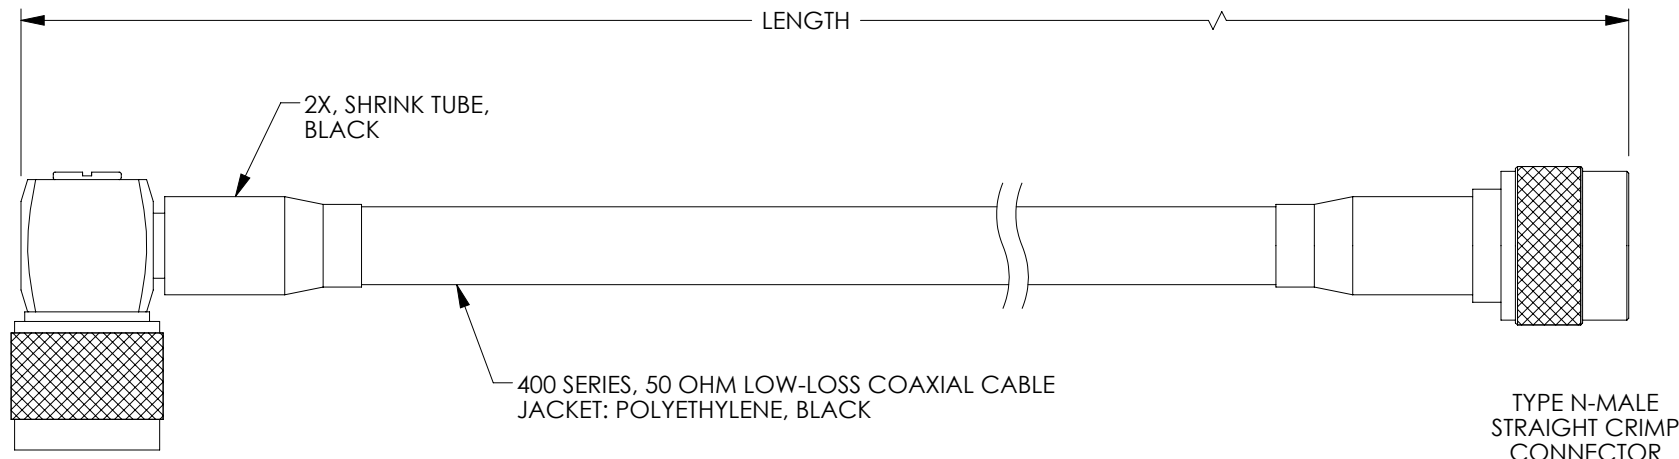

| LENGTH CODE CHART | | |
|-------------------|--------------------------------------|---------------------------|
| CABLE# & LENGTH | LENGTH SYMBOL | EXAMPLES OF PART# USED |
| CA-NMRNMFXXX | WHERE XXX = LENGTH IN FEET | CA-NMRNMF010 (10 FEET) |
| CA-NMRNMFNXX | WHERE NXX = LENGTH IN INCHES | CA-NMRNMFN16 (16 INCHES) |
| CA-NMRNMFMX | WHERE MX = LENGTH IN METERS | CA-NMRNMF07 (7 METERS) |
| CA-NMRNMFXXM | WHERE XMX = LENGTH IN DECIMAL METERS | CA-NMRNMF3M5 (3.5 METERS) |

- NOTES:
1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 2. CABLE ASSEMBLY SHALL RECEIVE INSERTION LOSS TEST PER L-COM SPECIFICATIONS.
 3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

RoHS Compliant ✓

| | | | | | |
|--|--|---------------------------------------|--|--|------------------|
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤ 12 [305] = +1 [25] / -0 > 12 [305] ≤ 60 [1524] = +2 [51] / -0 > 60 [1524] ≤ 120 [3048] = +4 [102] / -0 > 120 [3048] ≤ 300 [7620] = +6 [152] / -0 > 300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005 | APPROVALS DRAWN BY D.FRISIELLO CHECKED BY T.VADEN APPROVED BY P.PESA | DATE 7/12/12 7/12/12 7/12/12 | 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845 | | |
| | CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY | CATEGORY COAXIAL | | PRODUCT DESCRIPTION CA400 NM R/A to NM | |
| PROJECTION | COLOR VARIATIONS MAY OCCUR | SIZE A | FSCM NO. 43321 | DWG. NO. CA-NMRNMF | REV. A |
| SCALE: NONE | | CAD FILE: CA-NMRNMF.SLDDRW | | SHEET 1 OF 1 | |